



EUROPEAN
COMMISSION

Brussels, XXX
[...] (2023) XXX draft

ANNEX 7

ANNEX

to the

Commission Implementing Regulation

**amending Commission Regulations: (EU) No 321/2013, No 1299/2014, No 1300/2014,
No 1301/2014, No 1302/2014, No 1304/2014 and Commission Implementing
Regulation (EU) 2019/777**

ANNEX VII

The Annex to Implementing Regulation (EU) 2019/777 is amended as follows:

- (1) point 3 is replaced by:

‘3. COMMON CHARACTERISTICS

The characteristics set out in this Annex shall be applied across the Union rail system, as a common vocabulary specification enabling:

- (1) the infrastructure managers to publish their railway network data;
- (2) the railway undertakings and any other infrastructure data users to access and use these data.’;

- (2) a new point (6) is added in point 3.1 as follows:

‘(6) ‘common characteristics subset’ means a subset of items shared by sections of lines and/or operational points.’;

- (3) point 3.2.1 is replaced by the following:

‘3.2.1. For the purposes of the register of infrastructure, each infrastructure manager shall describe its railway network at least by sections of line and operational points and optionally via common characteristic subsets.’;

- (4) point 3.3.3.is replaced as follows:

‘The value of a parameter shall be provided when the corresponding item exists on the network that is described in accordance with the deadlines in Table 1.

The data presentation of the parameters listed in Table 1 shall be in accordance with the ERA Vocabulary referred to in Article 7a and which specification are referenced in Appendix A-1, index [A].

Any information relevant to the parameters is provided in Table 1. When Table 1 refers to a document of the infrastructure manager, the infrastructure manager in accordance with Article 5 shall submit such document to the Agency in an electronic format. Documents referred to in parameters 1.1.1.1.2.4.4, 1.1.1.1.6.4, 1.1.1.1.6.5, 1.1.1.3.7.1.3 and 1.1.1.3.11.3 shall be submitted in two EU languages.’;

(5) Table 1 is replaced by the following:

Items for the register of infrastructure (RINF)

Number	Title	Definition	Deadline to provide the parameter
1	MEMBER STATE		
1.1	SECTION OF LINE		
1.1.0.0.0	Generic information		
1.1.0.0.0.1	Infrastructure manager (IM)'s code	Infrastructure manager means anybody or undertaking that is responsible in particular for establishing and maintaining railway infrastructure or a part thereof.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.0.0.0.2	National line identification	Unique line identification or unique line number within Member State.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.0.0.0.3	Operational point at start of section of line	Unique OP ID at start of section of line (kilometres increasing from start OP to the end OP).	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.0.0.0.4	Operational point at end of section of line	Unique OP ID at end of section of line (kilometres increasing from start OP to the end OP)	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.0.0.0.5	Length of section of line	Length between operational points at start and end of section of line.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.0.0.0.6	Nature of Section of Line	Kind of section of line expressing size of presented data which depends on fact whether it connects OPs generated by division of a big node into several OPs or not.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.0.0.1	Route book specific parameters (Specific technical characteristics)		
1.1.0.0.1.1	Industrial risks — locations where it is dangerous for the driver to step out	Well Known Text polygonal shape	12 months after publication of Article 7 Guide
1.1.0.0.1.2	Operating language	The language or languages used in daily operation by infrastructure manager and published in its Network Statement, for the communication of operational or safety related messages between the staff of the infrastructure manager and the railway undertaking	12 months after publication of Article 7 Guide
1.1.0.0.1.3	Operational regime	Double track type	12 months after publication of Article 7 Guide
1.1.1	RUNNING TRACK		
1.1.1.0.0	Generic information		
1.1.1.0.0.1	Identification of track	Unique track identification or unique track number within section of line	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.0.0.2	Normal running direction	<p>The normal running direction is:</p> <ul style="list-style-type: none"> — the same as the direction defined by the start and end of the SoL: (N) — the opposite to the direction defined by the start and end of the SoL: (O) — both directions: (B) 	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.0.0.3	Lineside indications of distance (frequency, appearance and positioning)	<p>[NNNN] frequency in meters</p> <p>Appearance – selectable list</p> <p>[L/R] – the side along the track where the lineside indication is positioned (left or right)</p>	12 months after publication of Article 7 Guide
1.1.1.0.1	Topology information		
1.1.1.0.1.1	Accurate geographical description	Well Known Text line string representing the geographical shape of the track	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.0.1.2	Tracks connectivity to operational points	The first character string uniquely identifies the track inside the operational point at start connected to this track The second character string uniquely identifies the track inside the operational point at end connected to this track	12 months after publication of Article 7 Guide
1.1.1.1	Infrastructure subsystem		
1.1.1.1.1	Declarations of verification for track		
1.1.1.1.1.1	EC declaration of verification for track relating to compliance with the requirements from technical specifications for interoperability (TSIs) applicable to infrastructure subsystem	Unique number for EC declarations in accordance with Commission Implementing Regulation (EU) 2019/250 ⁽¹⁾ .	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.1.2	EI declaration of demonstration (as defined Commission 2014/881/EU ⁽²⁾) for track relating to compliance with the requirements from TSIs applicable to infrastructure subsystem	Unique number for EI declarations following the same format requirements as specified for EC declarations in Annex VII of Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.2	Performance parameter		
1.1.1.1.2.1	Trans-European Network (TEN) classification of track	Indication of the part of the trans-European network the line belongs to.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.2.1.2	TEN geographic information system identity (GIS ID)	Indication of the GIS ID of the section of TEN-T database to which the track belongs	1 January 2021
1.1.1.1.2.2	Category of line	Classification of a line according to the INF TSI	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.2.3	Part of a Railway Freight Corridor	Indication whether the line is designated to a Railway Freight Corridor	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.2.4	Load capability	A combination of the line category and speed at the weakest point of the track	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.2.4.1	National classification for load capability	National classification for load capability	16 January 2020
1.1.1.1.2.4.2	Compliance of structures with the High Speed Load Model (HSLM)	For sections of line with a maximum permitted speed of 200 km/h or more. Information regarding the procedure to be used to perform the dynamic compatibility check	16 January 2020
1.1.1.1.2.4.3	Railway location of structures requiring specific checks	Localisation of structures requiring specific checks	16 January 2020

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.2.4.4	Document with the procedure(s) for static and dynamic route compatibility checks	Electronic document available in two EU languages from the IM stored by the Agency with: <ul style="list-style-type: none"> — precise procedures for the static and dynamic route compatibility checks; Or <ul style="list-style-type: none"> — relevant information for carrying out the checks for specific structures. 	16 January 2020
1.1.1.1.2.5	Maximum permitted speed	Nominal maximum operational speed on the line as a result of infrastructure, energy and control, command and signalling subsystem characteristics expressed in kilometres/hour.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.2.6	Temperature range	Temperature range for unrestricted access to the line according to European standard.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.2.7	Maximum altitude	HighFest point of the section of line above sea level in reference to Normal Amsterdam's Peil (NAP).	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.2.8	Existence of severe climatic conditions	Climatic conditions on the line are severe according to European standard.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.3	Line layout		
1.1.1.1.3.1.1	Gauging	Gauges as defined in European standard or other local gauges, including lower or upper part. In accordance with point 7.3.2.2 of LOC&PAS TSI, sections of lines of the United Kingdom of Great Britain network may not have gauge reference profile.	16 January 2020
1.1.1.1.3.1.2	Railway location of particular points requiring specific checks	Location of particular points requiring specific checks due to deviations from gauging referred to in 1.1.1.1.3.1.1.	16 January 2020

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.3.1.3	Document with the transversal section of the particular points requiring specific checks	Electronic document available from the IM stored by the Agency with the transversal section of the particular points requiring specific checks due to deviations from gauging referred to in 1.1.1.1.3.1.1. Where relevant, guidance for the check with the particular point may be attached to the document with the transversal section.	16 January 2020
1.1.1.1.3.4	Standard combined transport profile number for swap bodies	Coding for combined transport with swap bodies (for all freight and mixed-traffic lines) in accordance with the specification referenced in Appendix A-1, index [B]	by 16 March 2019 at the latest for lines belonging to the TEN (1.1.1.1.2.1) For lines Off-TEN (1.1.1.1.2.1), when data not yet provided, upon justified request: - When data available, publication of the codification one month after the request - When data is not available and field measurements are needed, publication of the codification one year after the request

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.3.5	Standard combined transport profile number for semi-trailers	Coding for combined transport for semi-trailers (for all freight and mixed-traffic lines) in accordance with the specification referenced in Appendix A-1, index [B]	by 16 March 2019 at the latest for lines belonging to the TEN (1.1.1.1.2.1) For lines Off-TEN (1.1.1.1.2.1), when data not yet provided, upon justified request: - When data available, publication of the codification one month after the request - When data is not available and field measurements are needed, publication of the codification one year after the request
1.1.1.1.3.5.1	Specific information	Any relevant information from the IM relating to the line layout	1 January 2021
1.1.1.1.3.6	Gradient profile	Sequence of gradient values and locations of change in gradient	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.3.7	Minimum radius of horizontal curve	Radius of the smallest horizontal curve of the track in metres.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.3.8	Standard combined transport profile number for containers	Coding for combined transport for containers (for all freight and mixed-traffic lines) in accordance with the specification referenced in Appendix A-1, index [B]	<p>12 months after the adoption of the Article 7 Guide for lines belonging to the TEN (1.1.1.1.2.1)</p> <p>For lines Off-TEN (1.1.1.1.2.1), When data not yet provided, upon justified request:</p> <ul style="list-style-type: none"> - When data available, publication of the codification one month after the request - When data is not available and field measurements are needed, publication of the codification one year after the request

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.3.9	Standard combined transport profile number for roller units	Coding for combined transport for roller units (for all freight and mixed-traffic lines) in accordance with the specification referenced in Appendix A-1, index [B]	12 months after the adoption of the Article 7 Guide for lines belonging to the TEN (1.1.1.1.2.1) For lines Off-TEN (1.1.1.1.2.1), When data not yet provided, upon justified request: - When data available, publication of the codification one month after the request - When data is not available and field measurements are needed, publication of the codification one year after the request
1.1.1.1.4	Track parameters		
1.1.1.1.4.1	Nominal track gauge	Value expressed in millimetres that identifies the track gauge.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.4.2	Cant deficiency	Maximum cant deficiency expressed in millimetres defined as difference between the applied cant and a higher equilibrium cant the line has been designed for.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.4.3	Rail inclination	An angle defining the inclination of the head of a rail relative to the running surface	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.4.4	Existence of ballast	Specifies whether track construction is with sleepers embedded in ballast or not.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.5	Switches and crossings		
1.1.1.1.5.1	TSI compliance of in service values for switches and crossings	Switches and crossings are maintained to in service limit dimension as specified in TSI.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.5.2	Minimum wheel diameter for fixed obtuse crossings	Maximum unguided length of fixed obtuse crossings is based on a minimum wheel diameter in service expressed in millimetres.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.6	Track resistance to applied loads		
1.1.1.1.6.1	Maximum train deceleration	Limit for longitudinal track resistance given as a maximum allowed train deceleration and expressed in metres per square second.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.6.2	Use of eddy current brakes	Indication of limitations on the use of eddy current brakes.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.6.3	Use of magnetic brakes	Indication of limitations on the use of magnetic brakes.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.6.4	Document with the conditions for the use of eddy current brakes	Electronic document available in two EU languages from the IM stored by the Agency with conditions for the use of eddy current brakes identified in 1.1.1.1.6.2.	16 January 2020
1.1.1.1.6.5	Document with the conditions for the use of magnetic brakes	Electronic document available in two EU languages from the IM stored by the Agency with conditions for the use of magnetic brakes identified in 1.1.1.1.6.3.	16 January 2020
1.1.1.1.7	Health, safety and environment		
1.1.1.1.7.1	Use of flange lubrication forbidden	Indication whether the use of on-board device for flange lubrication is forbidden.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.7.2	Existence of level crossings	Indication whether level crossings (including pedestrian track crossing) exist on the section of line.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.7.3	Acceleration allowed near level crossing	Existence of limit for acceleration of train if stopping or recovering speed close to a level crossing expressed in a specific reference acceleration curve.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.7.4	Existence of trackside hot axle box detector (HABD)	Existence of trackside HABD	16 January 2020
1.1.1.1.7.5	Trackside HABD TSI compliant	Specific for the French, Italian and Swedish networks. Trackside hot axle box detector TSI compliant.	16 January 2020
1.1.1.1.7.6	Identification of trackside HABD	Specific for the French, Italian and Swedish networks. Applicable if trackside HABD is not TSI compliant, identification of trackside hot axle box detector.	16 January 2020
1.1.1.1.7.7	Generation of trackside HABD	Specific for the French Italian and Swedish networks. Generation of trackside hot axle box detector.	16 January 2020

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.7.8	Railway location of trackside HABD	Specific for the French Italian and Swedish networks. Applicable if trackside HABD is not TSI compliant, localisation of trackside hot axle box detector.	16 January 2020
1.1.1.1.7.9	Direction of measurement of trackside HABD	Specific for the French Italian and Swedish networks. Applicable if trackside HABD is not TSI compliant, direction of measurement of trackside Hot Axle Box Detector. If the direction of measurement is: — the same as the direction defined by the start and end of the SoL: (N) — the opposite to the direction defined by the start and end of the SoL: (O) — both directions: (B)	16 January 2020
1.1.1.1.7.10	Steady red lights required	Sections where two steady red lights are required in accordance with OPE TSI	1 January 2021
1.1.1.1.7.11	Belonging to a quieter route	Belonging to a 'quieter route' in accordance with Article 5b of NOI TSI	1 January 2021

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.7.12	Permit of use of reflective plates	Sections where is permitted to use the reflective plates on rail freight corridors, with a view to prioritise the current bottlenecks. Specific case for Belgium, France, Italy, Portugal and Spain until 1.1.2026	12 months after publication of Article 7 Guide
1.1.1.1.7.12.1	Conditions for use of reflective plates	Details of any conditions for using the reflective plates on freight corridors. Specific case for Portugal and Spain until 1.1.2025 and Belgium and France until 1.1.2026	12 months after publication of Article 7 Guide
1.1.1.1.8	Tunnel		
1.1.1.1.8.1	IM's code	Infrastructure Manager means anybody or undertaking that is responsible in particular for establishing and maintaining railway infrastructure or a part thereof.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.8.2	Tunnel identification	Unique tunnel identification or unique number within Member State	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.8.3	Start of tunnel	Geographical coordinates in decimal degrees and km of the line at the beginning of a tunnel.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.8.4	End of tunnel	Geographical coordinates in decimal degrees and km of the line at the end of a tunnel.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.8.5	EC declaration of verification relating to compliance with the requirements from TSIs applicable to railway tunnel	Unique number for EC declarations in accordance with Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.8.6	EI declaration of demonstration (as defined in Recommendation 2014/881/EU) relating to compliance with the requirements from TSIs applicable to railway tunnel	Unique number for EI declarations following the same format requirements as specified for EC declarations in Annex VII of Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.8.7	Length of tunnel	Length of a tunnel in metres from entrance portal to exit portal.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.8.8	Cross section area	Smallest cross section area in square metres of the tunnel	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.8.8.1	Compliance of the tunnel with INF TSI	compliance of the tunnel with INF TSI at the maximum permitted speed	1 January 2021
1.1.1.1.8.8.2	Document available from the IM with precise description of the tunnel	Electronic document available from the IM stored by the Agency with precise description of the clearance gauge and geometry of the tunnel	1 January 2021
1.1.1.1.8.9	Existence of emergency plan	Indication whether emergency plan exists.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.1.8.10	Fire category of rolling stock required	Passenger train fire category in accordance with point 4.1.4 of LOC&PAS TSI	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.8.11	National fire category of rolling stock required	Categorisation on how a passenger train with a fire on board will continue to operate for a defined time period.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.1.8.12	Existence of walkways	Indication of existence of walkways	12 months after publication of Article 7 Guide
1.1.1.1.8.12.1	Location of walkways	Value provided in Kilometric point of the start of the walkway and the length in m. Repeatable values for each location	12 months after publication of Article 7 Guide
1.1.1.1.8.13	Existence of evacuation and rescue points	Indication of existence of evacuation and rescue points	12 months after publication of Article 7 Guide
1.1.1.1.8.13.1	Location of evacuation and rescue points	Value provided in Kilometric point of the start of the point of evacuation and rescue point and the length in m. Repeatable values for each location	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.2	Energy subsystem		
1.1.1.2.1	Declarations of verification for track		
1.1.1.2.1.1	EC declaration of verification for track relating to compliance with the requirements from TSIs applicable to energy subsystem	Unique number for EC declarations in accordance with Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.1.2	EI declaration of demonstration (as defined Recommendation 2014/881/EU) for track relating to compliance with the requirements from TSIs applicable to energy subsystem	Unique number for EI declarations following the same format requirements as specified for EC declarations in Annex VII of Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.2	Contact line system		
1.1.1.2.2.1.1	Type of contact line system	Indication of the type of the contact line system.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.2.2.1.2	Energy supply system (Voltage and frequency)	Indication of the traction supply system (nominal voltage and frequency)	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.2.1.3	U _{max2} for the French network	Highest non-permanent voltage (U _{max2}) for France on lines not compliant with values defined in the the specification referenced in Appendix A-2, index [1]	16 January 2020
1.1.1.2.2.2	Maximum train current	Indication of the maximum allowable train current expressed in amperes.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.2.3	Maximum current at standstill per pantograph	Indication of the maximum allowable train current at standstill expressed in amperes.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest for DC systems 30 June 2024 for AC systems

Number	Title	Definition	Deadline to provide the parameter
1.1.1.2.2.4	Permission for regenerative braking	Indication whether regenerative braking is permitted, not permitted, or permitted under specific conditions.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.2.4.1	Conditions applying in regards to regenerative braking	Name and/or reference of the document specifying the conditions applying in regards to regenerative braking	12 months after publication of Article 7 Guide
1.1.1.2.2.5	Maximum contact wire height	Indication of the maximum contact wire height expressed in metres.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.2.6	Minimum contact wire height	Indication of the minimum contact wire height expressed in metres.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.3	Pantograph		
1.1.1.2.3.1	Accepted TSI compliant pantograph heads	Indication of TSI compliant pantograph heads which are allowed to be used.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.2.3.2	Accepted other pantograph heads	Indication of pantograph heads which are allowed to be used	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.3.3	Requirements for number of raised pantographs and spacing between them, at the given speed	Indication of maximum number of raised pantographs per train allowed and minimum spacing centre line to centre line of adjacent pantograph heads, expressed in metres, at the given speed.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.3.4	Permitted contact strip material	Indication of which contact strip materials are permitted to be used.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.4	OCL separation sections		
1.1.1.2.4.1.1	Phase separation	Indication of existence of phase separation and required information.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.2.4.1.2	Information on phase separation	Indication of required several information on phase separation	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.4.2.1	System separation	Indication of existence of system separation	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.4.2.2	Information on system separation	Indication of required several information on system separation	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.4.3	Distance between signboard and phase separation ending	Specific for route compatibility check on French network. Distance between the signboard authorizing the driver to 'raise pantograph' or 'close the circuit breaker' after passing the phase separation and the end of the phase separation section.	16 January 2020

Number	Title	Definition	Deadline to provide the parameter
1.1.1.2.5	Requirements for rolling stock		
1.1.1.2.5.1	Current or power limitation on board required	Indication of whether an on board current or power limitation function on vehicles is required.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.5.2	Contact force permitted	Indication of contact force allowed expressed in newton.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.5.3	Automatic dropping device required	Indication of whether an automatic dropping device (ADD) required on the vehicle.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.2.5.4	Document with restriction related to power consumption of specific electric traction unit(s)	Name and/or reference of the document specifying the restriction(s) related to power consumption of specific electric traction unit(s)	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.2.5.5	Document with restriction related to the position of Multiple Traction unit(s) to comply with contact line separation	Name and/or reference of the document specifying the restriction(s) related to the position of Multiple Traction unit(s) to comply with contact line separation	12 months after publication of Article 7 Guide
1.1.1.3	Control — command and signalling subsystem		
1.1.1.3.1	Declarations of verification for track		
1.1.1.3.1.1	EC declaration of verification for track relating to compliance with the requirements from TSIs applicable to control, command signalling subsystem	Unique number for EC declarations in accordance with Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.1.2	ERTMS error corrections required for the on-board	List of unacceptable errors impacting the IM network that are required to be solved in the on-board according to the CCS TSI point 7.2.10.3 specification maintenance point	12 months after the entry into force of CCS TSI and at least 12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.2	TSI compliant train protection system (ETCS)		
1.1.1.3.2.1	European Train Control System (ETCS) level	ETCS application level related to the track side equipment.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.2.2	ETCS baseline	ETCS baseline installed lineside.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.2.3	ETCS infill necessary for line access	Indication whether infill is required to access the line for safety reasons.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.2.4	ETCS infill installed line-side	Information about installed trackside equipment capable to transmit infill information by loop or Global System for Mobile communications for Railways (GSM-R) for level 1 installations.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.2.5	ETCS national packet 44 application implemented	Indication whether data for national applications is transmitted between track and train.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.2.6	Existence of operating restrictions or conditions	Indication whether restrictions or conditions due to partial compliance with the CCS TSI	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.2.8	Train integrity confirmation from on-board (not from driver) necessary for line access	Indication whether train confirmation from on-board is required to access the line for safety reasons.	16 January 2020
1.1.1.3.2.9	ETCS system compatibility	ETCS requirements used for demonstrating technical compatibility	16 January 2020
1.1.1.3.2.10	ETCS M_version	ETCS M_version according to the specification referenced in Appendix A-1, index [C]	1 January 2021

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.2.11	Safe consist length information from on-board necessary for access the line and SIL	Indication whether safe consist train length information from on-board is required to access the line for safety reasons and the required safety integrity level	12 months after publication of Article 7 Guide
1.1.1.3.2.12	Is the ETCS trackside engineered to transmit Track Conditions	According to the specification referenced in Appendix A-1, index [C] If the trackside does not provide Track Conditions, the driver will need to be informed about such conditions via alternative methods	12 months after publication of Article 7 Guide
1.1.1.3.2.12.1	Track conditions which can be transmitted	According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.13	ETCS trackside implements level crossing procedure or an equivalent solution	If the trackside does not implement any solution to cover defective LXs (which are normally protected by means of a technical system), then drivers will be required to comply with instructions received from other sources	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.2.14	Cant Deficiency used for the basic SSP	Essential information for drivers of trains with a worse (lower) tolerated cant deficiency than those for which the ETCS trackside provides SSP (Static Speed Profiles) in conjunction with 1.1.1.3.2.14.1 According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.14.1	Other Cant Deficiency train categories for which the ETCS trackside is configured to provide SSP	Essential information for drivers of trains with a worse (lower) tolerated cant deficiency than those for which the ETCS trackside provides SSP (Static Speed Profiles) in conjunction with 1.1.1.3.2.14. According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.15	Reasons for which an ETCS Radio Block Center can reject a train	List of cases subject to system design choices made by the infrastructure manager according to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.2.16	ETCS National Values		
1.1.1.3.2.16.1	D_NVROLL	Parameter used by the ETCS on-board to supervise the distance allowed to be travelled under the roll-away protection and the reverse movement protection, in metres According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.16.2	Q_NVEMRRLS -	Qualifier defining whether the application of the emergency brake for reasons other than a trip can be revoked as soon as the conditions for it have disappeared or after the train has come to a complete standstill. According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.16.3	V_NVALLOWOVTRP -	Speed limit allowing the driver to select the “override” function in km/h According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.2.16.4	V_NVSUPOVTRP -	Override speed limit to be supervised when the “override” function is active in km/h According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.16.5	D_NVOVTRP	Maximum distance for overriding the train trip in metres According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.16.6	T_NVOVTRP -	Maximum time for overriding the train trip in seconds According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.16.7	D_NVPOTRP -	Maximum distance for reversing in Post Trip mode in metres. According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.16.8	T_NVCONTACT -	Maximum time without a safe message from Radio Block Center before train reacts in seconds. According the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.2.16.9	M_NVCONTACT -	On-Board system reaction when T_NVCONTACT expires According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.16.10	M_NVDERUN -	Entry of Driver ID permitted while running According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.16.11	Q_NVDRIVER_ADHES -	Qualifier determining whether the driver is allowed to modify the adhesion factor used by the ETCS on-board to calculate the braking curves According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.16.12	Q_NVSBTSMPerm	Permission to use service brake in target speed monitoring	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.2.16.13	National Values used for the brake model	Set of parameters for adapting the braking curves calculated by the ETCS on-board system to match accuracy, performance and safety margins imposed by the infrastructure manager. It copies the content of Packet 3 or of Packet 203 as defined in the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.17	ID and phone number of ERTMS/ETCS Radio Block Center	Unique RBC identification (NID_C+NID_RBC) and calling number (NID_RADIO) as defined in the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.2.18	Big Metal Mass	Indication of existence of metal mass in the vicinity of the location, susceptible of perturbing the reading of balises by the on-board system.	12 months after publication of Article 7 Guide
1.1.1.3.2.19	ETCS system version 2.2 or 3.0 functionalities to be required in the next 5 years	List of ETCS system version 2.2 or 3.0 functionalities to be required in the next 5 years according to CCS TSI point 6.1.1.2 and Appendix G	12 months after publication of Article 7 Guide
1.1.1.3.3	TSI compliant radio (RMR)		

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.3.1	GSM-R version	GSM-R functional requirements specification and system requirements specification in accordance with the specification respectively referenced in Appendix A-1, index [E] and index [F], version number installed lineside.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.3.2	Number of active GSM-R mobiles (EDOR) or simultaneous communication session on board for ETCS level R needed to perform radio block centre handovers without having an operational disruption	Number of simultaneous communication session on board for ETCS level R required for a smooth running of the train. This relates to the radio block centre (RBC) handling of communication sessions. Not safety critical and no matter of interoperability.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.3.3	Optional GSM-R functions	Use of optional GSM-R functions which might improve operation on the line. They are for information only and not for network access criteria.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.3.3.1	Additional information on network characteristics	Any additional information on network characteristics or corresponding document available from the IM and stored by the Agency, e.g.; interference level, leading to the recommendation of additional on-board protection	1 January 2021
1.1.1.3.3.3.2	GPRS for ETCS	Indication if GPRS can be used for ETCS	1 January 2021
1.1.1.3.3.3.3	Area of implementation of GPRS	Indication of the area in which GPRS can be used for ETCS	1 January 2021
1.1.1.3.3.4	GSM-R use of group 555	Indication if group 555 is used	16 January 2020
1.1.1.3.3.5	GSM-R networks covered by a roaming agreement	List of GSM-R networks which are covered by a roaming agreement	16 January 2020
1.1.1.3.3.6	Existence of GSM-R roaming to public networks	Existence of roaming to a public network In case of Y, provide the name of the public network under parameter 1.1.1.3.3.7:	1 January 2021

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.3.7	Details on GSM-R roaming to public networks	If roaming to public networks is configured, please indicate to which networks, for which users and in which areas.	1 January 2021
1.1.1.3.3.8	No GSMR coverage	Indication if there is a no GSMR coverage	1 January 2021
1.1.1.3.3.9	Radio system compatibility voice	Radio requirements used for demonstrating technical compatibility voice	16 January 2020
1.1.1.3.3.10	Radio system compatibility data	Radio requirements used for demonstrating technical compatibility data	16 January 2020
1.1.1.3.3.11	GSM-R network is configured to allow forced de-registration of a functional number by another driver	This feature will condition the applicable operational rules for drivers and signallers when dealing with cab radios registered under wrong numbers	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.3.12	Radio Network ID	Unique identification of the GSM-R network the calling mobile station has to register with, as defined in the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.4	Train detection systems defined based on frequency bands		
1.1.1.3.4.1	Existence of train detection system fully compliant with the TSI:	Indication if there is any train detection system installed and fully compliant with the CCS TSI	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.7.1.1	Type of train detection system	Indication of types of train detection systems installed.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.4.2	Frequency bands for detection	Bands of the frequency management of the train detection systems as defined in the specification referenced in Appendix A-1, index [D], and in the specific cases or technical documents referred to in Article 13 of TSI CCS when they are available	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.4.2.1	Maximum interference current	Maximum interference current limits allowed for track circuits for a defined frequency band.	For train detection system compliant with TSIs: 12 months after publication of Article 7 Guide. For train detection system not TSI compliant: in relation to article 13 of CCS TSI
1.1.1.3.4.2.2	Vehicle impedance	Impedance as defined in the specification referenced in Appendix A-1, index [D]	For train detection system compliant with TSIs, 12 months after publication of Article 7 Guide. For train detection system not TSI compliant: in relation to article 13 of CCS TSI
1.1.1.3.4.2.3	Maximum magnetic field	The maximum magnetic field limits allowed for axle counters (in dB μ A/m) for a defined frequency band. It should be provided in 3 directions	For train detection system compliant with TSIs, the 12 months is correct. For train detection system not TSI compliant: in relation to article 13 of CCS TSI

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.5	Train protection legacy systems		
1.1.1.3.5.3	Train protection legacy system	Indication of which class B system is installed	16 January 2020
1.1.1.3.6	Radio Legacy Systems		
1.1.1.3.6.1	Other radio systems installed (Radio Legacy Systems)	Indication of radio legacy systems installed.	16 January 2020
1.1.1.3.7	Other train detection systems		
1.1.1.3.7.1.2	Type of track circuits or axle counters to which specific checks are needed	Reference to the technical specification of train detection system, in accordance with the specification referenced in Appendix A-1, index [D]	12 months after publication of Article 7 Guide
1.1.1.3.7.1.3	Document with the procedure(s) related to the type of train detection systems declared in 1.1.1.3.7.1.2	Electronic document from the IM stored by the Agency with precise values in accordance with TSI CCS Article 13 and the specification referenced in Appendix A-1, index [D], for the specific check to be performed for train detection systems identified in 1.1.1.3.7.1.2.	In accordance with TSI CCS Art. 13 and 12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.7.1.4	Section with train detection limitation	Specific for route compatibility check on French network.	16 January 2020
1.1.1.3.8	Transitions between systems		
1.1.1.3.8.1	Existence of switch over between different protection, control and warning systems while running	Indication whether a switch over between different systems whilst running exist	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.8.1.1	Special conditions to switch over between different class B train protection, control and warning systems	Conditions to switch over between different class B train protection, control and warning systems	12 months after publication of Article 7 Guide
1.1.1.3.8.2	Existence of switch over between different radio systems	Indication whether a switch over between different radio systems and no communication system whilst running exist	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.8.2.1	Special instructions to switch over between different radio systems	Name and/or reference of the document specifying the Special instructions to switch over between different radio systems	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.8.3	Special technical conditions required to switch over between ERTMS/ETCS and Class B systems	Name and/or reference of the document specifying the Special technical conditions required to switch over between ERTMS/ETCS and Class B systems	12 months after publication of Article 7 Guide
1.1.1.3.9	Parameters related to electromagnetic interferences		
1.1.1.3.9.1	Existence and TSI compliance of rules for magnetic fields emitted by a vehicle	Indication whether rules exist and are compliant with the TSI.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.9.2	Existence and TSI compliance of limits in harmonics in the traction current of vehicles	Indication whether rules exist and are compliant with the TSI.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.10	Line-side system for degraded situation		
1.1.1.3.10.1	ETCS level for degraded situation	ERTMS/ETCS application level for degraded situation related to the track side equipment.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.10.2	Other train protection, control and warning systems for degraded situation	Indication of existence of other system than ETCS for degraded situation.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.11	Brake related parameters		
1.1.1.3.11.1	Maximum braking distance requested	The maximum value of the braking distance [in metres] of a train shall be given for the maximum line speed.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.1.1.3.11.2	Availability by the IM of additional information	Availability by the IM of additional information as defined in point (2) of point 4.2.2.6.2 of OPE TSI	16 January 2020
1.1.1.3.11.3	Documents available by the IM relating to braking performance	Electronic document available in two EU languages from the IM stored by the Agency providing additional information as defined in point (2) of point 4.2.2.6.2 of OPE TSI	16 January 2020
1.1.1.3.12	Intentionally blank		
1.1.1.3.13	ATO		

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.13.1	ATO Grade of Automation	ATO grade of automation installed lineside.	12 months after publication of Article 7 Guide
1.1.1.3.13.2	ATO System version	ATO system version according to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.1.1.3.13.3	ATO communication system	Supported ATO communication systems from trackside	12 months after publication of Article 7 Guide
1.1.1.3.14	Signal		
1.1.1.3.14.1	Name of signal	Identifier of signal.	12 months after publication of Article 7 Guide
1.1.1.3.14.2	Type of signal	Signalling information for Route Book compilation.	12 months after publication of Article 7 Guide
1.1.1.3.14.3	Location and orientation	Relative position to the national line, given in km and indication if the signal refers to normal or opposite track direction	12 months after publication of Article 7 Guide
1.1.1.3.14.4	Relative distance of the danger point	Distance in meters to the danger point	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.1.1.3.14.5	Length of the non-stopping area	The length where is forbidden to stop the vehicle, value provided in meters	12 months after publication of Article 7 Guide
1.1.1.3.14.6	Geographical location of signal	Geographical coordinates in decimal degrees normally given for the position of the signal	12 months after publication of Article 7 Guide
1.1.1.4	Rules and restrictions		
1.1.1.4.1	Existence of rules and restrictions of a strictly local nature	Existence of rules and restrictions of a strictly local nature	1 January 2021
1.1.1.4.2	Documents regarding the rules or restrictions of a strictly local nature available by the IM	Electronic document available from the IM stored by the Agency providing additional information	1 January 2021

Number	Title	Definition	Deadline to provide the parameter
1.1.1.5	Vehicles for which Route compatibility is verified		
1.1.1.5.1	List of vehicle types already identified as compatible with Traffic load and load carrying capacity of infrastructure and train detection systems	The infrastructure managers shall provide through RINF the information to the RU regarding list of vehicle types compatible with the route for which they have already verified compatibility for parameter Traffic load and load carrying capacity of infrastructure and train detection systems, where such information is available.	12 months after publication of Article 7 Guide
1.1.1.5.2	List of vehicles already identified as compatible with Traffic load and load carrying capacity of infrastructure and train detection systems	The infrastructure managers shall provide through RINF the information or a document to the RU regarding list of vehicle(s) compatible with the route for which they have already verified compatibility for parameter Traffic load and load carrying capacity of infrastructure and train detection systems, where such information is available.	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2	OPERATIONAL POINT		
1.2.0.0.0	Generic information		
1.2.0.0.0.1	Name of operational point	Name normally related to the town or village or to traffic control purpose	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.0.0.0.2	Unique OP ID	Code composed of country code and alphanumeric OP code.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.0.0.0.3	OP primary location code	Primary location code developed for information exchange in accordance with the TSIs relating to telematics applications	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.0.0.0.4	Type of operational point	Type of facility in relation to the dominating operational functions.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.2.0.0.0.4.1	Type of track gauge changeover facility	Type of track gauge changeover facility	16 January 2020
1.2.0.0.0.5	Geographical location of operational point	Geographical coordinates in decimal degrees normally given for the centre of the OP.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.0.0.0.6	Railway location of Operational point	Kilometre related to line identification defining the location of the OP. This will normally be in the centre of the OP.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.0.0.0.7	Schematic overview of the operational point in digital form	The existence of a schematic overview of the operational point in digital form	12 months after publication of Article 7 Guide
1.2.0.0.0.7.1	Schematic overview of the operational point	Document providing the schematic overview of the operational point	12 months after publication of Article 7 Guide
1.2.0.0.0.7.2	Digital schematic overview	Diagrammatic representation of the operational point in Well Known Text polyline	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.0.0.0.8	Operating language	The language or languages used in daily operation by infrastructure manager and published in its Network Statement, for the communication of operational or safety related messages between the staff of the infrastructure manager and the railway undertaking	12 months after publication of Article 7 Guide
1.2.1	RUNNING TRACK		
1.2.1.0.0	Generic information		
1.2.1.0.0.1	IM's code	Infrastructure manager means any body or undertaking that is responsible in particular for establishing and maintaining railway infrastructure or a part thereof.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.0.2	Identification of track	Unique track identification or unique track number within OP	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.2.1.0.1	Declarations of verification for track		
1.2.1.0.1.1	EC declaration of verification for track relating to compliance with the requirements from TSIs applicable to infrastructure subsystem	Unique number for EC declarations in accordance with Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.1.2	EI declaration of demonstration (as defined Recommendation 2014/881/EU) relating to compliance with the requirements from TSIs applicable to infrastructure subsystem	Unique number for EI declarations following the same format requirements as specified for EC declarations in Annex VII of Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.2	Performance parameters		
1.2.1.0.2.1	TEN classification of track	Indication of the part of the trans-European network the track belongs to.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.2.1.0.2.2	Category of line:	Classification of a line according to the INF TSI	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.2.3	Part of a Railway Freight Corridor	Indication whether the line is designated to a Railway Freight Corridor	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.3	Line layout		
1.2.1.0.3.4	Gauging	Gauges as defined in European standard or other local gauges, including lower or upper part.	16 January 2020
1.2.1.0.3.5	Railway location of particular points requiring specific checks	Location of particular points requiring specific checks due to deviations from gauging referred to in 1.2.1.0.3.4.	16 January 2020

Number	Title	Definition	Deadline to provide the parameter
1.2.1.0.3.6	Document with the transversal section of the particular points requiring specific checks	Electronic document available from the IM stored by the Agency with the transversal section of the particular points requiring specific checks due to deviations from gauging referred to in 1.2.1.0.3.4. Where relevant, guidance for the check with the particular point may be attached to the document with the transversal section.	16 January 2020
1.2.1.0.4	Track parameters		
1.2.1.0.4.1	Nominal track gauge	A single value expressed in millimetres that identifies the track gauge.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.4.2	Use of eddy current brakes	Indication of limitations on the use of eddy current brakes.	12 months after publication of Article 7 Guide
1.2.1.0.4.3	Use of magnetic brakes	Indication of limitations on the use of magnetic brakes.	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.0.5	Tunnel		
1.2.1.0.5.1	IM's code	Infrastructure manager means any body or undertaking that is responsible in particular for establishing and maintaining railway infrastructure or a part thereof.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.5.2	Tunnel identification	Unique tunnel identification or unique tunnel number within MS	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.5.3	EC declaration of verification for tunnel relating to compliance with the requirements from TSIs applicable to railway tunnel	Unique number for EC declarations in accordance with Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.5.4	EI declaration of demonstration (as defined Recommendation 2014/881/EU) for tunnel relating to compliance with the requirements from TSIs applicable to railway tunnel	Unique number for EI declarations following the same format requirements as specified for EC declarations in Annex VII of Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.2.1.0.5.5	Length of tunnel	Length of a tunnel in metres from entrance portal to exit portal.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.5.6	Existence of emergency plan	Indication whether emergency plan exists.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.5.7	Fire category of rolling stock required	Categorisation how a passenger train with a fire on board will continue to operate for a defined time period	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.5.8	National fire category of rolling stock required	Categorisation how a passenger train with a fire on board will continue to operate for a defined time period — according to national rules if they exist	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.5.9	Diesel or other thermal traction allowed	Indication whether it is allowed to use diesel or other thermal traction in the tunnel	1 January 2021

Number	Title	Definition	Deadline to provide the parameter
1.2.1.0.5.10	Existence of walkways	Indication of existence of walkways	12 months after publication of Article 7 Guide
1.2.1.0.5.10.1	Location of walkways	Value provided in Kilometric point of the start of the walkway and the length in m. Repeatable values for each location	12 months after publication of Article 7 Guide
1.2.1.0.5.11	Existence of evacuation and rescue points	Indication of existence of evacuation and rescue points	12 months after publication of Article 7 Guide
1.2.1.0.5.11.1	Location of evacuation and rescue points	Value provided in Kilometric point of the start of the evacuation and rescue point and the length in m. Repeatable values for each location	12 months after publication of Article 7 Guide
1.2.1.0.6	Platform		
1.2.1.0.6.1	IM's code	Infrastructure manager means any body or undertaking that is responsible in particular for establishing and maintaining railway infrastructure or a part thereof.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.2.1.0.6.2	Identification of platform	Unique platform identification or unique platform number within OP	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.6.3	TEN Classification of platform	Indicates the part of the trans-European network the platform belongs to.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.6.4	Usable length of platform	The maximum continuous length (expressed in metres) of that part of platform in front of which a train is intended to remain stationary in normal operating conditions for passengers to board and alight from the train, making appropriate allowance for stopping tolerances.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.6.5	Height of platform	Distance between the upper surface of platform and running surface of the neighbouring track. It is the nominal value expressed in millimetres.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.2.1.0.6.6	Existence of platform assistance for starting train	Indication of existence of equipment or staff supporting the train crew in starting the train.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.6.7	Range of use of the platform boarding aid	Information of the train access level for which the boarding aid can be used.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.1.0.6.8	Curvature of the platform	Indication of the existence of the curvature of the platform	12 months after publication of Article 7 Guide
1.2.1.0.7	Contact line system		
1.2.1.0.7.1	Permission for charging electric energy storage for traction purposes at standstill	Point at which IM authorises charging of electric energy storage for traction purposes at standstill	30 June 2024 at the latest
1.2.1.0.7.2	Permitted conditions for charging electric energy storage for traction purposes at standstill	Conditions set by IMs according to a standardised document	30 June 2024 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.2.1.0.8	Signal		
1.2.1.0.8.1	Name of signal	Identifier of signal	12 months after publication of Article 7 Guide
1.2.1.0.8.2	Type of signal	Signalling information for Route Book compilation. This list shall include “fixed signals that protect danger points”	12 months after publication of Article 7 Guide
1.2.1.0.8.3	Location and orientation	Relative position to the national line, given in km and indication if the signal refers to normal or opposite track direction	12 months after publication of Article 7 Guide
1.2.1.0.8.4	Relative distance of the danger point	Distance in meters to the danger point	12 months after publication of Article 7 Guide
1.2.1.0.8.5	Geographical location of signal	Geographical coordinates in decimal degrees normally given for the position of the signal	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1	Control-command and signalling subsystem		
1.2.1.1.1	TSI compliant train protection system (ETCS)		
1.2.1.1.1.1	European Train Control System (ETCS) level	ETCS application level related to the track side equipment.	12 months after publication of Article 7 Guide
1.2.1.1.1.2	ETCS baseline	ETCS baseline installed lineside.	12 months after publication of Article 7 Guide
1.2.1.1.1.3	ETCS infill necessary for line access	Indication whether infill is required to access the line for safety reasons.	12 months after publication of Article 7 Guide
1.2.1.1.1.4	ETCS infill installed line-side	Information about installed trackside equipment capable to transmit infill information by loop or Global System for Mobile communications for Railways (GSM-R) for level 1 installations.	12 months after publication of Article 7 Guide
1.2.1.1.1.5	ETCS national packet 44 application implemented	Indication whether data for national applications is transmitted between track and train.	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.1.6	Existence of operating restrictions or conditions	Indication whether restrictions or conditions due to partial compliance with the CCS TSI – Commission Regulation (EU) 2016/919 (5) exist.	12 months after publication of Article 7 Guide
1.2.1.1.1.8	Train integrity confirmation from on-board (not from driver) necessary for line access	Indication whether train confirmation from on-board is required to access the line for safety reasons.	12 months after publication of Article 7 Guide
1.2.1.1.1.9	ETCS system compatibility	ETCS requirements used for demonstrating technical compatibility	12 months after publication of Article 7 Guide
1.2.1.1.1.10	ETCS M_version	ETCS M_version according to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.11	Safe consist length information from on-board necessary for access the line and SIL	Indication whether safe consist train length information from on-board is required to access the line for safety reasons and the required safety integrity level	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.1.12	Is the ETCS trackside engineered to transmit Track Conditions	According to the specification referenced in Appendix A-1, index [C] If the trackside does not provide Track Conditions, the driver will need to be informed about such conditions via alternative methods	12 months after publication of Article 7 Guide
1.2.1.1.1.12.1	Track conditions which can be transmitted	According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.13	ETCS trackside implements level crossing procedure or an equivalent solution	If the trackside does not implement any solution to cover defective LXs (which are normally protected by means of a technical system), then drivers will be required to comply with instructions received from other sources	12 months after publication of Article 7 Guide
1.2.1.1.1.14	Cant Deficiency used for the basic SSP	Essential information for drivers of trains with a worse (lower) tolerated cant deficiency than those for which the ETCS trackside provides SSP (Static Speed Profiles) in conjunction with 1.2.1.1.1.14.1 According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.1.14.1	Other Cant Deficiency train categories for which the ETCS trackside is configured to provide SSP	Essential information for drivers of trains with a worse (lower) tolerated cant deficiency than those for which the ETCS trackside provides SSP (Static Speed Profiles) in conjunction with 1.2.1.1.1.14. According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.15	Reasons for which an ETCS Radio Block Center can reject a train	List of cases subject to system design choices made by the infrastructure manager according to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.16	ETCS National Values		
1.2.1.1.1.16.1	D_NVROLL	Parameter used by the ETCS on-board to supervise the distance allowed to be travelled under the roll-away protection and the reverse movement protection, in metres According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.1.16.2	Q_NVEMRRLS	Qualifier defining whether the application of the emergency brake for reasons other than a trip can be revoked as soon as the conditions for it have disappeared or after the train has come to a complete standstill. According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.16.3	V_NVALLOWOVTRP	Speed limit allowing the driver to select the “override” function in km/h According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.16.4	V_NVSUPOVTRP	Override speed limit to be supervised when the “override” function is active in km/h According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.16.5	D_NVOVTRP	Maximum distance for overriding the train trip in metres According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.1.16.6	T_NVOVTRP	Maximum time for overriding the train trip in seconds According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.16.7	D_NVPOTRP	Maximum distance for reversing in Post Trip mode in metres. According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.16.8	T_NVCONTACT	Maximum time without a safe message from Radio Block Center before train reacts in seconds. According the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.16.9	M_NVCONTACT	On-Board system reaction when T_NVCONTACT expires According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.16.10	M_NVDERUN	Entry of Driver ID permitted while running According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.1.16.11	Q_NVDRIVER_ADHES	Qualifier determining whether the driver is allowed to modify the adhesion factor used by the ETCS on-board to calculate the braking curves According to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.16.12	Q_NVSBTSMPerm	Permission to use service brake in target speed monitoring	12 months after publication of Article 7 Guide
1.2.1.1.1.16.13	National Values used for the brake model	Set of parameters for adapting the braking curves calculated by the ETCS on-board system to match accuracy, performance and safety margins imposed by the infrastructure manager. It copies the content of Packet 3 or of Packet 203 as defined in the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.1.17	ID and phone number of ERTMS/ETCS Radio Block Center	Unique RBC identification (NID_C+NID_RBC) and calling number (NID_RADIO) as defined in the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.1.18	Big Metal Mass	Indication of existence of metal mass in the vicinity of the location, susceptible of perturbing the reading of balises by the on-board system.	12 months after publication of Article 7 Guide
1.2.1.1.1.19	ETCS error corrections required for the on-board	List of unacceptable errors impacting the IM network that are required to be solved in the on-board according to the CCS TSI point 7.2.10.3 specification maintenance point	12 months after the entry into force of CCS TSI and at least 12 months after publication of Article 7 Guide
1.2.1.1.1.20	ETCS system version 2.2 or 3.0 functionalities to be required in the next 5 years	List of ETCS system version 2.2 or 3.0 functionalities to be required in the next 5 years according to CCS TSI point 6.1.1.2 and Appendix G	12 months after publication of Article 7 Guide
1.2.1.1.2	TSI compliant radio (RMR)		
1.2.1.1.2.1	GSM-R version	GSM-R functional requirements specification and system requirements specification in accordance with the specification respectively referenced in Appendix A-1, index [E] and index [F], version number installed lineside.	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.2.2	Number of active GSM-R mobiles (EDOR) or simultaneous communication session on board for ETCS level R needed to perform radio block centre handovers without having an operational disruption	Number of simultaneous communication session on board for ETCS level R required for a smooth running of the train. This relates to the radio block centre (RBC) handling of communication sessions. Not safety critical and no matter of interoperability.	12 months after publication of Article 7 Guide
1.2.1.1.2.3	Optional GSM-R functions	Use of optional GSM-R functions which might improve operation on the line. They are for information only and not for network access criteria.	12 months after publication of Article 7 Guide
1.2.1.1.2.3.1	Additional information on network characteristics	Any additional information on network characteristics or corresponding document available from the IM and stored by the Agency, e.g.; interference level, leading to the recommendation of additional on-board protection	12 months after publication of Article 7 Guide
1.2.1.1.2.3.2	GPRS for ETCS	Indication if GPRS can be used for ETCS	12 months after publication of Article 7 Guide
1.2.1.1.2.3.3	Area of implementation of GPRS	Indication of the area in which GPRS can be used for ETCS	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.2.4	GSM-R use of group 555	Indication if group 555 is used	12 months after publication of Article 7 Guide
1.2.1.1.2.5	GSM-R networks covered by a roaming agreement	List of GSM-R networks which are covered by a roaming agreement	12 months after publication of Article 7 Guide
1.2.1.1.2.6	Existence of GSM-R roaming to public networks	Existence of roaming to a public network In case of Y, provide the name of the public network under parameter 1.2.1.1.2.7:	12 months after publication of Article 7 Guide
1.2.1.1.2.7	Details on GSM-R roaming to public networks	If roaming to public networks is configured, please indicate to which networks, for which users and in which areas.	12 months after publication of Article 7 Guide
1.2.1.1.2.8	No GSMR coverage	Indication if there is a no GSMR coverage	12 months after publication of Article 7 Guide
1.2.1.1.2.9	Radio system compatibility voice	Radio requirements used for demonstrating technical compatibility voice	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.2.10	Radio system compatibility data	Radio requirements used for demonstrating technical compatibility data	12 months after publication of Article 7 Guide
1.2.1.1.2.11	GSM-R network is configured to allow forced de-registration of a functional number by another driver	This feature will condition the applicable operational rules for drivers and signallers when dealing with cab radios registered under wrong numbers	12 months after publication of Article 7 Guide
1.2.1.1.2.12	Specific constraints imposed by the GSM-R network operator on ETCS on-board units only able to operate in circuit-switch	These constraints, where applicable, are meant to manage the limited number of circuit-switched radio connections that can be handled simultaneously by a Radio Block Center	12 months after publication of Article 7 Guide
1.2.1.1.2.13	Radio Network ID	Unique identification of the GSM-R network the calling mobile station has to register with, as defined in the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.3	Train detection systems defined based on frequency bands		
1.2.1.1.3.1	Existence of train detection system fully compliant with the TSI:	Indication if there is any train detection system installed and fully compliant with the CCS TSI	12 months after publication of Article 7 Guide
1.2.1.1.3.1.1	Type of train detection system	Indication of types of train detection systems installed.	12 months after publication of Article 7 Guide
1.2.1.1.3.2	Frequency bands for detection	Bands of the frequency management of the train detection systems as defined in the specification referenced in Appendix A-1, index [D], and in the specific cases or technical documents referred to in Article 13 of TSI CCS when they are available	12 months after publication of Article 7 Guide
1.2.1.1.3.2.1	Maximum interference current	Maximum interference current limits allowed for track circuits for a defined frequency band.	12 months after publication of Article 7 Guide
1.2.1.1.3.2.2	Vehicle impedance	Impedance as defined in the specification referenced in Appendix A-1, index [D]	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.3.2.3	Maximum magnetic field	The maximum magnetic field limits allowed for axle counters (in dB μ A/m) for a defined frequency band. It should be provided in 3 directions	12 months after publication of Article 7 Guide
1.2.1.1.4	Train protection legacy systems		
1.2.1.1.4.1	Train protection legacy system	Indication of which class B system is installed	12 months after publication of Article 7 Guide
1.2.1.1.5	Radio Legacy Systems		
1.2.1.1.5.1	Other radio systems installed (Radio Legacy Systems)	Indication of radio legacy systems installed.	12 months after publication of Article 7 Guide
1.2.1.1.6	Other train detection systems		
1.2.1.1.6.1	Type of track circuits or axle counters to which specific checks are needed	Reference to the technical specification of train detection system, in accordance with the specification referenced in Appendix A-1, index [D]	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.6.2	Document with the procedure(s) related to the type of train detection systems declared in 1.2.1.1.6.1	Electronic document from the IM stored by the Agency with precise values in accordance with TSI CCS Article13 and the specification referenced in Appendix A-1, index [D], for the specific check to be performed for train detection systems identified in 1.2.1.1.6.1	12 months after publication of Article 7 Guide
1.2.1.1.6.3	Section with train detection limitation	Specific for route compatibility check on French network.	12 months after publication of Article 7 Guide
1.2.1.1.7	Transitions between systems		
1.2.1.1.7.1	Existence of switch over between different protection, control and warning systems while running	Indication whether a switch over between different systems whilst running exist	12 months after publication of Article 7 Guide
1.2.1.1.7.1.1	Special conditions to switch over between different class B train protection, control and warning systems	Conditions to switch over between different class B train protection, control and warning systems	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.7.2	Existence of switch over between different radio systems	Indication whether a switch over between different radio systems and no communication system whilst running exist	12 months after publication of Article 7 Guide
1.2.1.1.7.2.1	Special instructions to switch over between different radio systems	Name and/or reference of the document specifying the Special instructions to switch over between different radio systems	12 months after publication of Article 7 Guide
1.2.1.1.7.3	Special technical conditions required to switch over between ERTMS/ETCS and Class B systems	Name and/or reference of the document specifying the Special technical conditions required to switch over between ERTMS/ETCS and Class B systems	12 months after publication of Article 7 Guide
1.2.1.1.8	Parameters related to electromagnetic interferences		
1.2.1.1.8.1	Existence and TSI compliance of rules for magnetic fields emitted by a vehicle	Indication whether rules exist and are compliant with the TSI.	12 months after publication of Article 7 Guide
1.2.1.1.8.2	Existence and TSI compliance of limits in harmonics in the traction current of vehicles	Indication whether rules exist and are compliant with the TSI.	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.1.1.9	Line-side system for degraded situation		
1.2.1.1.9.1	ETCS level for degraded situation	ERTMS/ETCS application level for degraded situation related to the track side equipment.	12 months after publication of Article 7 Guide
1.2.1.1.9.2	Other train protection, control and warning systems for degraded situation	Indication of existence of other system than ETCS for degraded situation.	12 months after publication of Article 7 Guide
1.2.1.1.10	ATO		
1.2.1.1.10.1	ATO Grade of Automation	ATO grade of automation installed lineside.	12 months after publication of Article 7 Guide
1.2.1.1.10.2	ATO System version	ATO system version according to the specification referenced in Appendix A-1, index [C]	12 months after publication of Article 7 Guide
1.2.1.1.10.3	ATO communication system	Supported ATO communication systems from trackside	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.2	SIDING		
1.2.2.0.0	Generic information		
1.2.2.0.0.1	IM's code	Infrastructure manager means any body or undertaking that is responsible in particular for establishing and maintaining railway infrastructure or a part thereof.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.0.2	Identification of siding	Unique siding identification or unique siding number within OP	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.0.3	TEN Classification of siding	Indicates the part of the trans-European network the siding belongs to.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.2.2.0.1	Declaration of verification for siding		
1.2.2.0.1.1	EC declaration of verification for siding relating to compliance with the requirements from TSIs applicable to infrastructure subsystem	Unique number for EC declarations in accordance with Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.1.2	EI declaration of demonstration (as defined Recommendation 2014/881/EU) for siding relating to compliance with the requirements from TSIs applicable to infrastructure subsystem	Unique number for EI declarations following the same format requirements as specified for EC declarations in Annex VII of Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.2	Performance parameter		
1.2.2.0.2.1	Usable length of siding	Total length of the siding/stabling track expressed in metres where trains can be parked safely.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.2.2.0.3	Line layout		
1.2.2.0.3.1	Gradient for stabling tracks	Maximum value of the gradient expressed in millimetres per metre.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.3.2	Minimum radius of horizontal curve	Radius of the smallest horizontal curve, expressed in metres.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.3.3	Minimum radius of vertical curve	Radius of the smallest vertical curve expressed in metres.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.4	<i>Fixed installations for servicing trains</i>		
1.2.2.0.4.1	Existence of toilet discharge	Indication whether exists an installation of toilet discharge (fixed installation for servicing trains) as defined in INF TSI	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.4.2	Existence of external cleaning facilities	Indication whether exists an installation of external cleaning facility (fixed installation for servicing trains) as defined in INF TSI	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.2.2.0.4.3	Existence of water restocking	Indication whether exists an installation of water restocking (fixed installation for servicing trains) as defined in INF TSI	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.4.4	Existence of refuelling	Indication whether exists an installation of refuelling (fixed installation for servicing trains) as defined in INF TSI.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.4.5	Existence of sand restocking	Indication whether an installation of sand restocking exists (fixed installation for servicing trains).	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.4.6	Existence of electric shore supply	Indication whether exists an installation of electric shore supply (fixed installation for servicing trains).	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.2.2.0.5	Tunnel		
1.2.2.0.5.1	IM's code	Infrastructure manager means any body or undertaking that is responsible in particular for establishing and maintaining railway infrastructure or a part thereof.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.5.2	Tunnel identification	Unique tunnel identification or unique number within Member State	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.5.3	EC declaration of verification for tunnel relating to compliance with the requirements from TSIs applicable to railway tunnel	Unique number for EC declarations in accordance with Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.5.4	EI declaration of demonstration (as defined Recommendation 2014/881/EU) for tunnel relating to compliance with the requirements from TSIs applicable to railway tunnel	Unique number for EI declarations following the same format requirements as specified for EC declarations in Annex VII of Commission Implementing Regulation (EU) 2019/250.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest

Number	Title	Definition	Deadline to provide the parameter
1.2.2.0.5.5	Length of tunnel	Length of a tunnel in metres from entrance portal to exit portal.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.5.6	Existence of emergency plan	Indication whether emergency plan exists.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.5.7	Fire category of rolling stock required	Categorisation how a passenger train with a fire on board will continue to operate for a defined time period.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.5.8	National fire category of rolling stock required	Categorisation how a passenger train with a fire on board will continue to operate for a defined time period — according to national rules if they exist.	In accordance with Implementing Decision 2014/880/EU and by 16 March 2019 at the latest
1.2.2.0.5.9	Existence of walkways	Indication of existence of walkways	12 months after publication of Article 7 Guide

Number	Title	Definition	Deadline to provide the parameter
1.2.2.0.5.9.1	Location of walkways	Value provided in Kilometric point of the start of the walkway and the length in m. Repeatable values for each location	12 months after publication of Article 7 Guide
1.2.2.0.5.10	Existence of evacuation and rescue points	Indication of existence of evacuation and rescue points	12 months after publication of Article 7 Guide
1.2.2.0.5.10.1	Location of evacuation and rescue points	Value provided in Kilometric point of the start of the evacuation and rescue point and the length in m. Repeatable values for each location	12 months after publication of Article 7 Guide
1.2.2.0.6	Contact line system		
1.2.2.0.6.1	Maximum current at standstill per pantograph	Indication of the maximum allowable train current at standstill expressed in amperes.	16 January 2020 for DC systems 30 June 2024 for AC systems
1.2.3	Rules and restrictions		
1.2.3.1	Existence of rules and restrictions of a strictly local nature	Existence of rules and restrictions of a strictly local nature	1 January 2021


Number	Title	Definition	Deadline to provide the parameter
1.2.3.2	Documents regarding the rules or restrictions of a strictly local nature available by the IM	Electronic document available from the IM stored by the Agency providing additional information	1 January 2021
1.2.4	Navigability		
1.2.4.1	Internal connection	Describes the internal connectivity between the tracks of the operational point and it is presented like a from-to network relation, where From and To are the names of the tracks connecting each other	12 months after publication of Article 7 Guide

- (6) point 4.1 is amended as follows:

The first paragraph is replaced by the following:

‘The architecture of the registers of infrastructure system shall be as follows.’;

- (7) Figure 1 is replaced by the following:

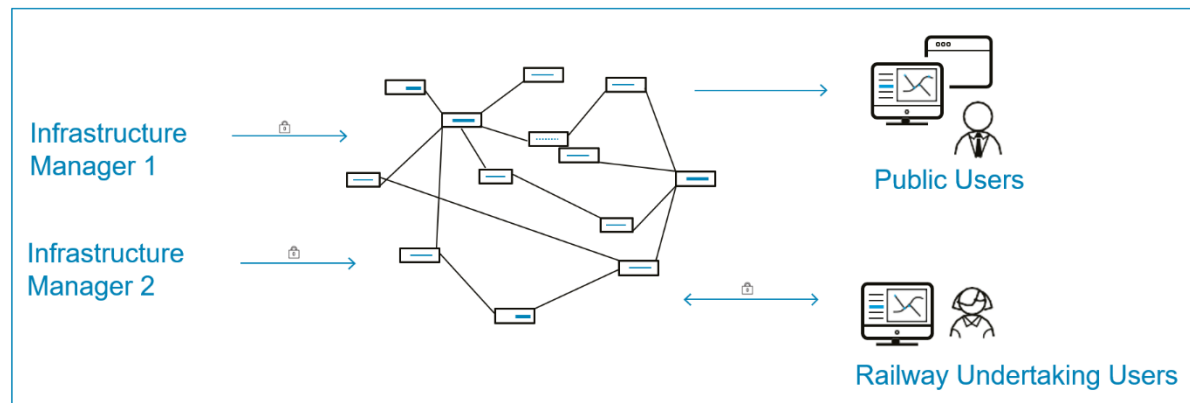

’;

- (8) point 4.2 is replaced by the following:

‘The RINF application shall be a web-based application set up, managed, maintained and administered by the Agency.

The Agency shall make available to infrastructure managers the following files and documents that shall be used for submitting the data to the RINF application:

- (a) user manual;
- (b) specification of the structure of the files for the transmission of data;
- (c) description of codes for preparing the files — Data provision guide describing the validation process of the transmitted files;
- (d) the ERA vocabulary.’;

- (9) point 4.3 is amended as follows:

- (a) point (a) is replaced by the following:

‘(a) user management: the Agency must be able to manage users' access rights.’;

- (b) point (b) is replaced by the following:

‘(b) information auditing: RINF application must enable viewing the logs of activity of registered users, connectivity and authentication.’;

- (c) points (d) to (n) are replaced by the following:

- ‘(d) search for the register of infrastructure data including OPs and/or SoLs, including data validity dates;
- (e) visual representation of data of the register of infrastructure allowing publication of thematic maps;
- (f) list of tracks of SoLs and OPs which are part of a route defined by the user and export the corresponding characteristics;

- (g) deliver a timestamped export file each time the export of characteristics resulting from a search is intended to be used by a railway undertaking in accordance with Article 23(1) of Directive (EU) 2016/797;
- (h) application programming interface (API) and/or an open querying endpoint;
- (i) validation, upload and reception of the data sets provided by an Infrastructure Manager.’;

(10) point 4.4 is replaced by the following:

‘4.4. Operating mode

The register of infrastructure system shall provide three main interfaces via the RINF application:

- (a) one to be used by the infrastructure managers in order to submit their set of data;
- (b) one to be used by RINF application users in order to connect to the system and retrieve information
- (c) one to be used by Railway Undertakings for subscription for notifications of changes in the infrastructure they operate on.

The RINF application central database shall make data provided by infrastructure managers publicly available without any modification.

The basic functionality of the RINF application shall allow users to search and retrieve data of register of infrastructure.

The RINF application shall retain the complete historical record of data made available by the infrastructure managers. Those records shall be stored for two years from the date of withdrawal of the data.

The Agency, as administrator of the RINF application, shall provide access to users upon request. Answers to the queries initiated by the RINF application users shall be provided within 24 hours from the moment the query was initiated. Infrastructure Managers shall be able to keep their data updated directly in RINF, following the specifications of Table 1 and submit it to the RINF application in accordance with Article 5.

Infrastructure Managers shall upload the files to the RINF application through a dedicated interface provided for this operation. A specific module shall facilitate the validation and uploading of data.’

(11) point 5 is amended as follows:

- (a) the first paragraph is replaced by the following:
 ‘The application guide for the common specifications referred to in Article 7 shall be made publicly available by the Agency on its website and updated as appropriate in compliance with the ERA Vocabulary referred to in Article 7a and which specification are referenced in Appendix A-1, index [A].’;
- (b) in the third paragraph, point (a) is deleted;

- (12) A new appendix A is added as follows:

Appendix A

Technical specifications referenced in this Regulation

A-1 Technical documents (available on ERA website)

Index	Characteristics to be assessed	RINF point	Mandatory technical document point
[A]	ERA Vocabulary ERA/TD/Vocabulary version 3.0.0 (released on 2023-03-29)		
[B]	ERA Technical Document on codification of combined transport ERA/TD/2023-01/CCT version 1.1 (realased on 2023-03-21)		
[B.1]	Codification of lines	Table 1, 1.1.1.1.3.4 1.1.1.1.3.5 1.1.1.1.3.8 1.1.1.1.3.9	2.1
[C]	SUBSET-026 System Requirements Specification TSI CCS, Appendix A, index [4]		
[C.1]	ETCS M_version	Table 1, 1.1.1.3.2.10 1.2.1.1.1.10	Chapter 7, Section 7.5.1.79
[C.2]	ETCS trackside engineered to transmit Track Conditions	Table 1, 1.1.1.3.2.12 1.1.1.3.2.12.1 1.2.1.1.1.12 1.2.1.1.1.12.1	Chapter 5, section 5.18.1.1
[C.3]	Cant Deficiency used for the basic Static Speed Profile (SSP)	Table 1, 1.1.1.3.2.14 1.1.1.3.2.14.1 1.2.1.1.1.14 1.2.1.1.1.14.1	Chapter 7, section 7.5.1.82.1

[C.4]	Rejection of a train by an ETCS Radio Block Center	Table 1, 1.1.1.3.2.15 1.2.1.1.1.15	Chapter 5, section 5.4
[C.5]	ETCS National Values	Table 1, 1.1.1.3.2.16.1 1.2.1.1.1.16.1	Chapter 7, section 7.5.1.17
		Table 1, 1.1.1.3.2.16.2 1.2.1.1.1.16.2	Chapter 7, section 7.5.1.123
		Table 1, 1.1.1.3.2.16.3 1.2.1.1.1.16.3	Chapter 7, section 7.5.1.161
		Table 1, 1.1.1.3.2.16.4 1.2.1.1.1.16.4	Chapter 7, section 7.5.1.163
		Table 1, 1.1.1.3.2.16.5 1.2.1.1.1.16.5	Chapter 7, section 7.5.1.15
		Table 1, 1.1.1.3.2.16.6 1.2.1.1.1.16.6	Chapter 7, section 7.5.1.149
		Table 1, 1.1.1.3.2.16.7 1.2.1.1.1.16.7	Chapter 7, section 7.5.1.16
		Table 1, 1.1.1.3.2.16.8 1.2.1.1.1.16.8	Chapter 7, section 7.5.1.148
		Table 1, 1.1.1.3.2.16.9 1.2.1.1.1.16.9	Chapter 7, section 7.5.1.74

		Table 1, 1.1.1.3.2.16.10 1.2.1.1.1.16.10	Chapter 7, section 7.5.1.75
		Table 1, 1.1.1.3.2.16.11 1.2.1.1.1.16.11	Chapter 7, section 7.5.1.122
		Table 1, 1.1.1.3.2.16.13 1.2.1.1.1.16.13	<ul style="list-style-type: none"> – Packet 3 (for M_VERSION above 2.0): Chapter 7, 7.4.2.1.1 – Packet 203 (for M_VERSION 1.1): SRS Chapter 6, 6.5.1.5.22,
[C.6]	ID and phone number of ERTMS/ETCS Radio Block Center	Table 1, 1.1.1.3.2.17 1.2.1.1.1.17	Chapter 7, 7.5.1.86, 7.5.1.95 and 7.5.1.96
[C.7]	GSM-R version	Table 1, 1.1.1.3.3.1 1.2.1.1.2.1	Relevant cl.
[C.8]	Radio Network ID	Table 1, 1.1.1.3.3.13 1.2.1.1.2.13	Chapter 7, 7.5.1.91.1
[C.9]	ATO System version	Table 1, 1.1.1.3.13.2 1.2.1.1.10.2	Chapter 1, 1.0.0
[D]	ERA/ERTMS/033281 - V 5.0 Interfaces between Control-Command and Signalling Trackside and other Subsystems TSI CCS, Appendix A, index [77]		
[D.1]	Frequency bands for detection	Table 1, 1.1.1.3.4.2 1.2.1.1.3.2	Relevant cl.

[D.2]	Vehicle impedance	Table 1, 1.1.1.3.4.2.2 1.2.1.1.3.2.2	3.2.2.1
[D.3]	Type of track circuits	Table 1, 1.1.1.3.7.1.2 1.2.1.1.6.1	Relevant cl.
[D.4]	Type of axle counters	Table 1, 1.1.1.3.7.1.2 1.2.1.1.6.1	Relevant cl.
[E]	EIRENE FRS GSM-R Functional Requirements Specification TSI CCS, Appendix A, index [32]		
[E.1]	GSM-R version	1.1.1.3.3.1 1.2.1.1.2.1	Relevant cl.
[F]	EIRENE SRS GSM-R System Requirements Specification TSI CCS, Appendix A, index [33]		
[F.1]	GSM-R version	1.1.1.3.3.1 1.2.1.1.2.1	Relevant cl.

A-2 Standards

Index	Characteristics to be assessed	RINF point	Mandatory technical document point
[1]	EN50163:2004 Supply voltages of traction systems		
[1.1]	U _{max2}	Table 1, 1.1.1.2.2.1.3	Table 1

,